



BM 30

Qn
35 l/min

Q max
45 l/min

DISTRIBUTEUR MONOBLOC
MONOBLOCK VALVE
DISTRIBUIDOR MONOBLOQUE

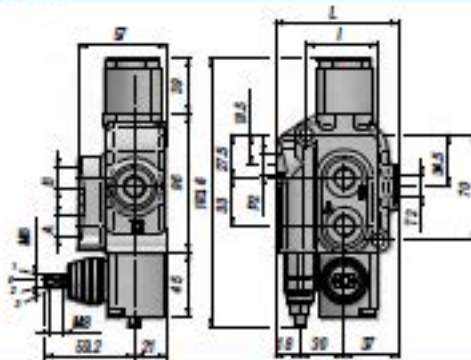

Code Code Código	Type Type Tipo	N° Leviers Sections No. Nr. Palancas	Orifices - Threads - Orificios					PN bar	P MAX U bar	P MAX S bar	L	I	kg
			A-B BSP	P BSP	T BSP	P2 BSP	T2 BSP						
DBM1111001	BM 30/1/GU/MO A1	1	3/8"	-	-	3/8"	3/8"	250	-	80	85	46	2,20

PN - Pression nominale - Nominal pressure - Presión nominal

P MAX U - Pression maxi sur les orifices - Max. pressure on ports - Presión Max. sobre los orificios

P MAX S - Pression maxi sur le retour - Max. pressure in tank-line - Presión Max. al retorno




Limiteur de pression - Relief Valve - Limitador de presión: X = 30:90 bar (70) - U = 80:230 bar (140) (Standard) - K = 150:300 bar (200)

LES CODES CORRESPONDENT A - THESE CODES AND PRICES REFER TO - LOS CODIGOS SE REFIEREN A LOS MODELOS DE:

DOUBLE EFFET - 3 POSITIONS - RAPPEL RESSORT - A/B FERMEE - ORIFICES BSP

DOUBLE ACTING TYPE - 3 POSITIONS - SPRING RETURN - A/B PORTS CLOSED - BSP THREADS

DOBLE EFECTO - 3 POSICIONES - RETORNO POR MUELLE - A/B CERRADOS - ROSCAS BSP

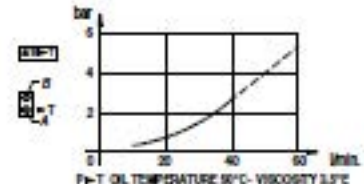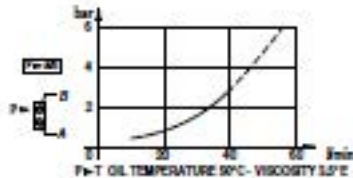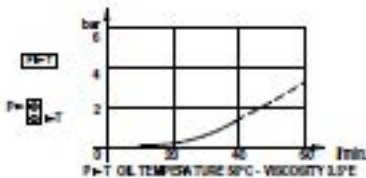

TIROIR
SPOOL TYPE - CORREDERAS

A	
B	
C	
D	
L	
Z	

POSITIONNEUR
SPOOL CONTROL - POSICIONADOR

1	
2	
3	
6	
7	
8	
12	
42	

SUR DEMANDE
ON REQUEST - BAJO PEDIDO

MC	commande manuelle + teton manual operator with cam accionamiento manual con leva
MX	levier de sécurité safety lever palanca de seguridad
DO	came de commande cam operator control por levas
1P	commande pneumatique pneumatic operator accionamiento neumático
MSW	microrupteur microswitch microinterruptor


BM30

Caratteristiche generali / Technical characteristics		
	l/min	GPM
• Portata nominale / Nominal flow	35	9
• Portata limite / Max flow	45	12
• Portata limite EO / Max flow EO	35	9
	bar	PSI
• Pressione nominale / Nominal pressure	250	3600
• Pressione nominale EO / Nominal pressure EO	180	2600
• Contropressione max allo scarico / Max pressure in tank line	80	1100


BM30




P=1 TEMPERATURA OIL 50°C - VISCOSITÀ 51VE

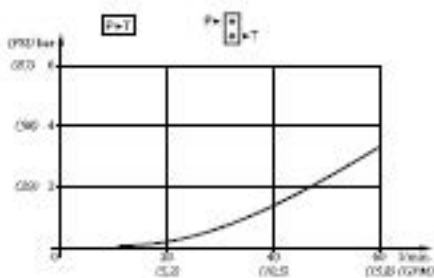


P=AB TEMPERATURA OIL 50°C - VISCOSITÀ 51VE

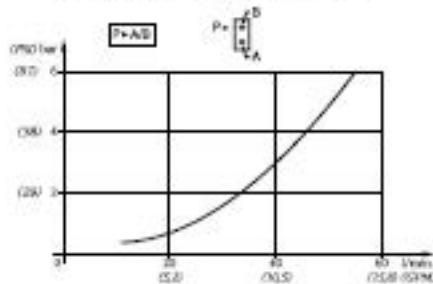

A/B=T TEMPERATURA OIL 50°C - VISCOSITÀ 51VE

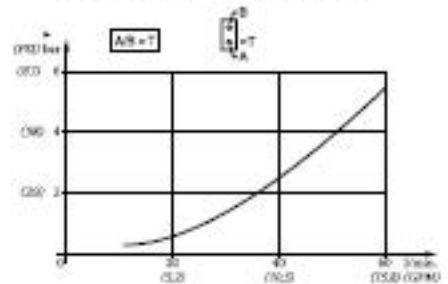


BM 30/L - ENTRATA SINISTRA (A - B - C)
LEFT INLET (A - B - C)

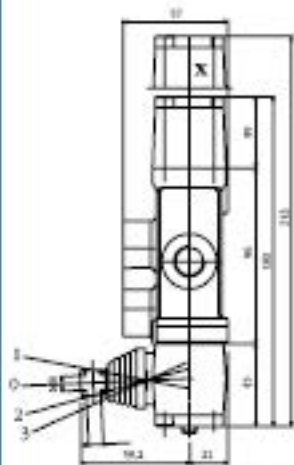

X = POSIZIONATORE - SPOOL CONTROL 2-3-12-14

BM 30/R - ENTRATA DESTRA (A - B - C - D)
RIGHT INLET (A - B - C - D)






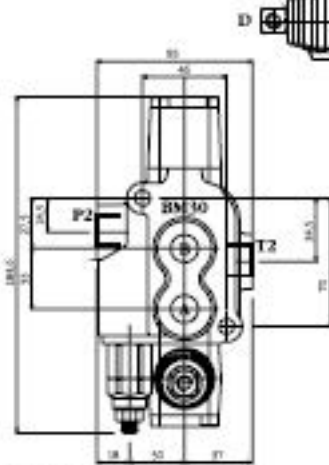


X = POSIZIONATORE - SPOOL CONTROL 2-3-12-14

MOD	L	I	Kg
BM30			2,2

FILETTATURA STANDARD - STANDARD THREADS			
COD	A-B	P ₂	T ₂
G	3/8"	3/8"	3/8"
F	3/4" - 16	3/4" - 16	3/4" - 16

◀ Su richiesta filettature diverse
Other threads available on request



Pour toute demande complémentaire veuillez nous contacter sur info@hydrocllic.com