


DIN 2353 / ISO 8434-1

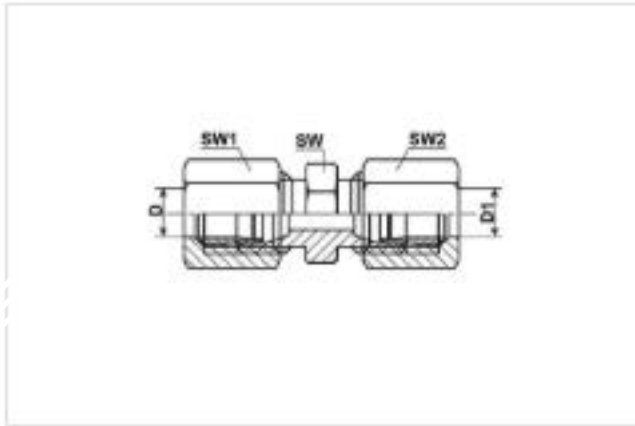

Acier, surface sans chrome VI, galvanisé

Référence	Description	D	D1	SW	SW1	SW2	Forme	Conditionnement
104-000	G04-LL	4	4	9	10	10	LL	50
104-000-6	GR06/04-LL	4	6	11	12	10	LL	50
106-000	G06-LL	6	6	11	12	12	LL	100
106-000-L	G06-L	6	6	12	14	14	L	50
106-000-8	GR08/06-LL	6	8	12	14	12	LL	50
106-000-10-L	GR10/06-L	6	10	17	19	14	L	50
108-000	G08-LL	8	8	12	14	14	LL	50
108-000-L	G08-L	8	8	14	17	17	L	50
110-000	G10-LL	10	10	14	17	17	LL	50
110-000-L	G10-L	10	10	17	19	19	L	50
110-000-8-L	GR08/10-L	8	10	17	19	17	L	50

Pour toute demande complémentaire veuillez nous contacter sur [info@hydrocllic.com](mailto:info@hydrocllic.com)

Inox 1.4401 / 316 / V4A

Référence	Description	D	D1	SW	SW1	SW2	Forme	Conditionnement
104-000-VA	G04-LL	4	4	9	10	10	LL	25
1014-001	G06/04-LL	4	6	9	12	10	LL	25
106-000-VA	G06-LL	6	6	11	12	12	LL	25
106-000-VA-L	G06-L	6	6	12	14	14	L	25
108-000-VA	G08-LL	8	8	12	14	14	L	25
108-000-VA-L	G08-L	8	8	14	17	17	L	25
110-000-VA-L	G10-L	10	10	17	19	19	L	25